




TECHNICAL INFORMATION | TRACK-MOUNTED IMPACT CRUSHERS

MOBIREX MR 130 Z/130 Zi EVO2



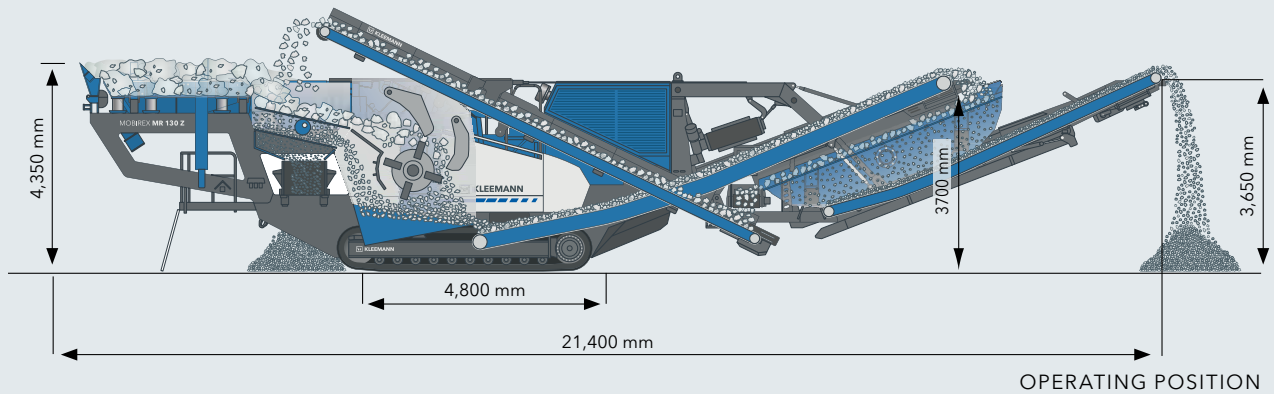

TECHNICAL HIGHLIGHTS

- Optimised material flow as a result of extending system widths
- Hydraulic gap setting
- Simple and intuitive control concept SPECTIVE
- Efficient and powerful diesel-direct drive
- High-performance secondary screening unit with oversize grain returning (option)

TECHNICAL INFORMATION MR 130 Z/130 Zi EVO2

Feeding unit

Feed capacity up to approx. (t/h) ¹⁾	450
Feed size max. (mm)	1,040 x 650
Feed height (with extension) (mm)	4,350 (4,710)
Hopper volume (with extension) (m³)	5 (9)
Width x length (with extension) (mm)	2,250 x 3,700 (3,000 x 3,700)

Vibrating feeder

Width x length (mm)	2615
---------------------	------

Prescreening

Type	double-deck heavy-piece screen
Width x length (mm)	1,210 x 2,300

Side discharge conveyor rigid (optional)

Width x length (extended) (mm)	650 x 4,000 (6,000)
Discharge height approx. (extended) (mm)	2,900 (3,650)

Crusher

Impact crusher type	SHB 130 - 090
Crusher inlet width x height (mm)	1,300 x 900
Crusher weight approx. (kg)	16,500
Rotor diameter (mm)	1,200
Crusher drive type approx. (kW)	direct, 310
Adjustment of impact toggles	infinitely variable, fully hydraulic
Crushing capacity with demolished concrete up to approx. (t/h)	300 ²⁾
Crushing capacity with rubble up to approx. (t/h)	300 ²⁾
Crushing capacity with broken asphalt up to approx. (t/h)	260 ³⁾
Crushing capacity with limestone up to approx. (t/h)	270 ²⁾

Discharge chute

Width x length (mm)	1400 x 2700
---------------------	-------------

Crusher discharge conveyor

Width x length (mm)	1400 x 9700
Discharge height approx. (mm)	3650

Power supply unit

Drive concept	Diesel direct ⁴⁾
MR 130 Z EVO2: Scania (Tier 3/Stage IIIA) (kW)	371 (1,800 rpm)
Scania (LRC) (kW)	410 (1,800 rpm)
MR 130 Zi EVO2: Scania (Tier 4f/Stage IV) (kW)	368 (1,800 rpm)
Generator (kVA)	135

Secondary screening unit (optional)

Type	single-deck lightweight screen
Width x length (mm)	1,550 x 4,550
Oversize grain return conveyor (wider) (mm)	500 x 9,750 (650 x 9,750)
Discharge height of fine grain discharge conveyor approx. (mm)	3,580

Transport

Transport dimensions without options

Transport height (mm)	3,750
Transport length (mm)	18,385
Transport width	3,000

Transport dimensions with secondary screening unit

Transport length with screening unit (mm)	21,620
Transport width with screening unit (mm)	3,150 - 3,400

Transport weight screening unit (kg)	6,500
Transport weight of basic plant – max. configuration (kg)	49,500 - 64,500

¹⁾ dependent on the type and composition of the feed material, the feed size, the prescreening, as well as the desired final grain size

²⁾ for final grain size 0 - 45 mm with approx. 10 - 15% oversize grain

³⁾ for final grain size 0 - 32 mm with approx. 10 - 15% oversize grain

⁴⁾ all ancillary electric drives



MOBIREX MR 130 Z/130 Zi EVO2

The mobile impact crusher MOBIREX MR 130 Z EVO2 can be deployed universally as an all-rounder and produces first class final product quality. With a crusher inlet width of 1,300 mm, it achieves a production rate that until now was only associated with considerably larger crushing plant. This is made possible by outstanding cost effectiveness and performance with a variety of technical highlights. Thanks to the compact design, the plant is easy to transport and can be assembled and disassembled again quickly.

STANDARD EQUIPMENT

- Hydraulically foldable feed hopper, can be operated from the ground
- Frequency-controlled vibrating feeder
- Frequency-controlled prescreen
- Prescreen with slotted grate or punched plate (upper deck) and wire cloth mesh (lower deck)
- Impact crusher with blow bars set manganese
- Continuous Feed System CFS: for optimal and continuous crusher feed
- Automatic crusher gap adjustment
- Integrated overload protection
- Lock & Turn (rotor turning and locking device): Device for safely turning and locking the rotor for service purposes or blockages
- Swivel arm for changing blow bars
- SPECTIVE control concept: menu-guided user interface, 12-inch control panel; telematic system WITOS FleetView for efficient fleet and service management
- Lockable control cabinet, dust and vibration-protection
- LED lighting
- Eye hooks
- Water spray system for dust reduction

OPTIONS

- Hopper extension: hydraulically foldable
- Side discharge conveyor 4 m, rigid: can be mounted on left or right, discharge height 2,900 mm, must be dismantled for transport, including spray system
- Extended side discharge conveyor 6 m, rigid: can be mounted on left or right, discharge height approx. 3,650 mm, must be dismantled for transport, including spray system
- Side discharge conveyor belt cover (sheet metal) in connection with rigid side discharge conveyor
- Side discharge conveyor, hydraulically folding, can be mounted on both sides, discharge height 2,900 mm, remains on machine during transport, inc. spray system
- Quick Track for selecting machine operating mode quickly and easily, operation via radio remote control
- Climate packages: Hot or cold package
- Ergonomic power pack enclosure for insulation of noise sources
- Electromagnetic separator, permanent magnet or magnet preparation
- Secondary screening unit, in convenient container dimensions, hook-lift compatible available with 500 and 650 mm wide oversize grain return conveyor
- Belt scale, available for crusher discharge conveyor and fine grain conveyor (secondary screening unit)
- Wind sifter for removing foreign material and light elements from the oversize grain by means of an 11 kW blower with air outlet below the transfer conveyor.
- 110 V socket
- Track pads for crawler chassis for protection of ground
- Premium lighting



SPARE PARTS

For economical operation of the machine, it is also necessary to select the correct wear parts. Original parts from KLEEMANN are optimally designed for the requirements of the user and machine. They are characterised by a long service life, excellent quality, good availability and trouble-free assembly. With application know-how and competent advice, we can find the optimum wear part for our customers to match their individual application.

BLOW BARS


Machine type	Shape blow bars	Dimensions W x H x L [mm]	Blow bars Manganese	Blow bars Martensitic	Martensitic blow bars with ceramic	Blow bars Chrome steel	Blow bars Chrome steel with ceramics
MR 110 Z EVO2	C-shape	90 x 360 x 1080	X	X	X	X	X
MR 122 Z	X-shape	130 x 340 x 1250	X	X	X		
MR 130 Z EVO2	C-shape	100 x 370 x 1280	X	X	X	X	X
MR 150 Z	X-shape	135 x 370 x 1500	X	X	X		



C-shape



S-shape




X-shape

Material	Feed material		Hard stone with high abrasiveness (e.g. granite), river gravel	Asphalt	Concrete low percentage ferrous material	Concrete high percentage ferrous material	Rubble
	Soft to medium-hard stone (e.g. limestone), river gravel < 150 N/mm	Hard stone with low abrasiveness (e.g. basalt), river gravel					
Manganese	●	●	●	●	●	●	●
Martensitic	●	● < 450 mm	●	●	●	●	●
Martensitic with ceramics	● < 450 mm	● < 450 mm	● < 450 mm	●	●	●	●
Chrome steel	● < 250 mm	● < 250 mm	● < 250 mm	●	●	●	●
Chrome steel with ceramics	● < 250 mm	● < 250 mm	● < 250 mm	●	●	●	●

● Recommended ● Partly recommended ● Not recommended

For queries about the suitable rotor ledge, please contact your sales and service organisation.

IMPACT PLATES

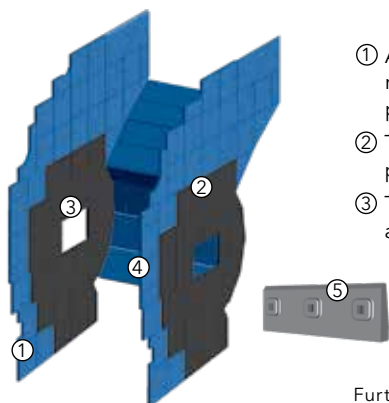

- ① All wear plates from the main wear zone with mounting hardware are included in the service package for easy exchange.
- ② Thick-walled KLEEMANN Resistant Steel wear plates protect the housing
- ③ The wear plates are for the most part interchangeable, greatly reducing the spare parts stock.

- ④ The mounting hardware includes all necessary screws for a secure fit.
- ⑤ Example for cast manganese impact plate that can be replaced individually depending on the machine and requirement.*

* Two materials available: manganese steel and martensitic steel

Further information is available at www.partsandmore.net or in our Parts and more catalogue