




TECHNICAL INFORMATION | TRACK-MOUNTED IMPACT CRUSHERS

# MOBIREX MR 170 Z



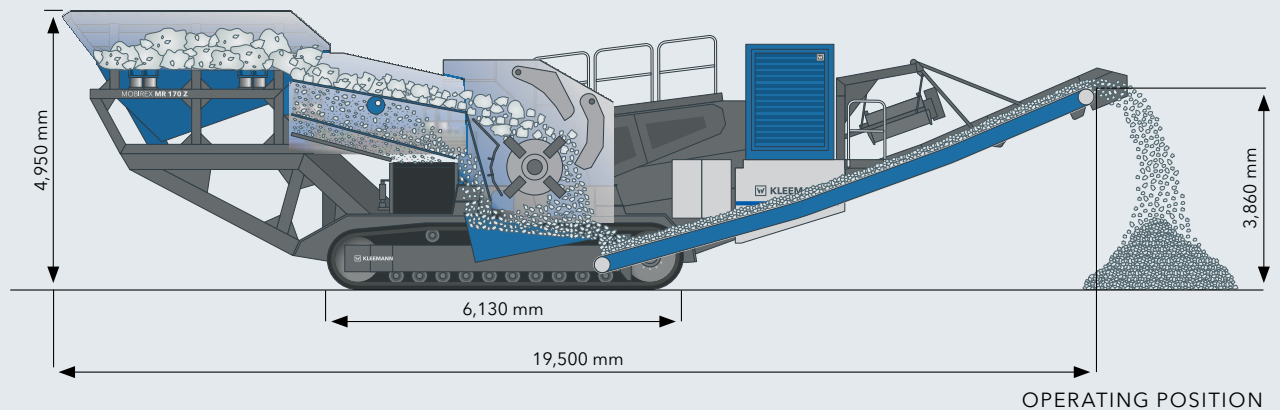

- Extremely robust design
- Frequency-controlled vibrating feeder
- PLC control with LCD display
- Independent vibrating double-deck prescreen

## TECHNICAL INFORMATION MR 170 Z

### Feeding unit

Feed capacity up to approx. (t/h) <sup>1)</sup>	700
Feed size max. (mm)	1,300 x 800
Feed height (mm)	4,950
Hopper volume (m <sup>3</sup> )	7.5

### Vibrating feeder

Width x Length (mm)	1,500 x 3,600
---------------------	---------------

### Prescreening

Type	double-deck heavy-piece screen
Width x Length (mm)	1,550 x 3,500

### Side discharge conveyor (optional)

Width x Length (mm)	1,000 x 8,000
Discharge height approx. (mm)	3,700

### Crusher

Impact crusher type	SHB 17/100
Crusher inlet width x height (mm)	1,660 x 1,000
Crusher weight approx. (kg)	31,800
Rotor diameter (mm)	1,330
Crusher drive type, approx. (kW)	electric, 355
Crushing capacity with limestone up to approx. (t/h)	600 <sup>2)</sup>

### Vibrating extractor

Width x Length (mm)	1,500 x 2,600
---------------------	---------------

### Crusher discharge conveyor

Width x Length (mm)	1,600 x 10,000
Discharge height approx. (mm)	3,860

### Power supply unit

Drive concept	diesel-electric
Scania (Tier 3 / Stage IIIA) (kW)	480
Generator (kVA)	880

### Weight <sup>3)</sup>

Total weight without options approx. (kg)	93,000
---	--------

<sup>1)</sup> dependent on the type and composition of the feed material, the feed size, the prescreening, as well as the desired final grain size

<sup>2)</sup> for final grain size 0 - 120 mm with approx. 5 - 10% oversize grain

<sup>3)</sup> no options

**Standard features:** Hydraulically foldable feed hopper / Frequency-controlled vibrating feeder / Radio remote control / PLC control with LCD display / Control cabinet, double dust encapsulation, lockable, suspended and with over pressure system / Swivel arm for changing the blow bars / Spray system for dust reduction

**Options:** Hopper extension / Side discharge conveyor / Electromagnetic separator, permanent magnet or magnet preparation / Preparation for installation of belt scale / Belt covers (aluminium, tarpaulin) / Remote maintenance via GSM modem